3-5 Assy-Accessory Part

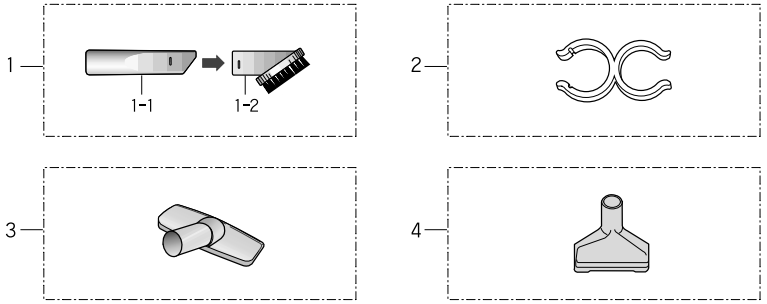

Location No.	Code No.	Description	Specification	Q'ty	Remarks
1	DJ67-60002B	BRUSH-DUSTING ASSY	ASSY, SUB GRY	1	
1-1		DUSTING-CREVICE	PP, SUB GRY	1	●
1-2		DUSTING-BRUSH	PP, SUB GRY	1	●
2	DJ61-90123	HANGER-ACCESSORY	PP, SUB GRY	1	
3	DJ67-60154C	BRUSH-SOFT ASSY	PP, SUB GRY	1	
4	DJ67-60152A	BRUSH-UPHO ASSY	PP, SUB GRY	1	

4. PCB Diagrams

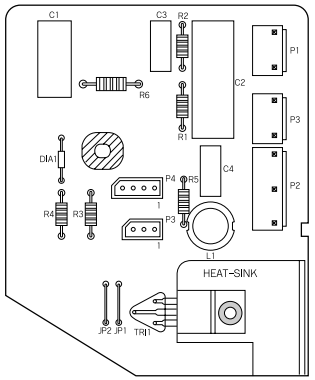

◉ PBA-MAIN (DJ41-10164)
B : VC-7113H (HANDLE-CONTROL)
C : VC-7113 (ON/OFF)

PART LIST

Loc No.	SPEC	CODE NO.	B	C			
R1	R-CARBON;1/2W 470K-J	2001-001150	0	0			
R2	R-CARBON;1/2W 470K-J	2001-001150	0	0			
R3	R-CARBON;1/2W 330K-J	2001-001129					
R4	R-CARBON;1/4W 10-J	2001-001416	0				
R5	R-CARBON;1/2W 20K-J	2001-001103	0				
R6	R-METAL;1/4, 169K-F	2004-000376					
R6	WIRE-JUMP;300V, 0.6mm	3812-000219	0				
C1	MMP 104K, 275VAC	2306-001034	0				
C2	MMP 334K, 275VAC	2306-001033	0	0			
C3	MMP 472K, 250VAC	2306-001037	0	0			
C4	MMP 472K, 250VAC	2306-001037	0	0			
L1	COIL-CHOKE; 8mH	DJ27-40104A	0				
DIA1	DIAC;HT-40, (40 ±2V)	1401-000128	0				
P1	YW396-03VAT WHT	3711-002845	0	0			
P2	YW396-05VAT WHT	3711-000262	0	0			
P3	5267-03 WHT, MOLEX	3711-000903	0				
P4	5267-04 WHT, MOLEX	3711-000964					
P5	YW396-03VAT YEL	3711-000212					
JP1	JUMPER-WIRE	3811-000389		0			
JP2	JUMPER-WIRE	3811-000389		0			
HEAT-SINK	VC-7550	DJ62-30117A	0				
PCB-MAIN	VC-7100	DJ41-10164A	0	0			
RIVET-PH	RIVET;KAVX 3.2 9.2L	6041-000213	0				
LABEL-SERIAL	ART, W10, L15, PASS	DJ68-20258A	0	0			
TRI1	TRIAC;M1661S	1401-000123	0				